


Note

Clip version: When renewing trunk lid, drill the 4 holes (on model 200 three) prior to painting.

Glued version: When using the glued version, these parts will be available as spare parts only.


Clip version

- 1 Mark bores according to drawing, center-punch and drill, dia. 5.7+0.1 mm.
- 2 Remove drilling swarf and treat hole edges with zinc dust paint.

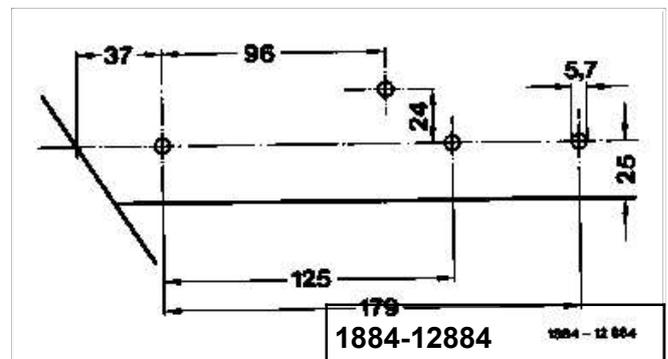

Glued version

- 3 Heat model identification and glueing surfaces to approx. 40 °C (heat radiator, hot air blower or the like).
- 4 Position model identification according to drawing and press on.

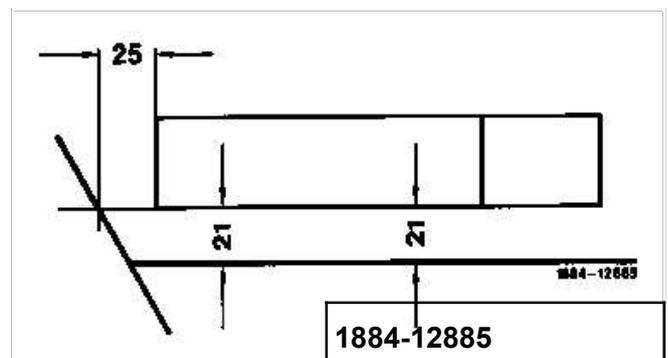

Note: If a model identification is glued on a trunk lid with holes, check these holes for leaks and seal from inside with an MB sealing cord or MB body sealing compound, if applicable.